

室外壁灯

OWL0801

现代简约的几何设计，与环境融合，
 外壳纯压铸，表面阳极氧化或粉末涂层，
 光源被小心地隐藏起来，以确保过路行人没有眩光，
 结构防水，便于后期维护，
 适用于室外走廊、别墅、庭院和其他建筑墙壁等。



R/G/B/W



易于安装

可选择
亮度调光可支持
极端环境

IP65




AC-IN

规格参数

型号	▶ OWL0801
工作电压	▶ 100V AC, 220V AC
功率	▶ 2*3W/2*6W (Option)
光源类型	▶ LED 2835
色温	▶ 2700K, 3000K, 4000K
频率	▶ 90min, 80min
光源效率	▶ 110 lm/W@3000K
发光角度	▶ 45°/60°/80°/90°
材质	▶ 优质铝 + 钢化玻璃
工作温度	▶ -20°C ~ +55°C
储存温度	▶ -25°C ~ +60°C
光源寿命	▶ 50,000 hours/L70 at 25°C
通电连接	▶ 快速接头 (可选)
产品尺寸	▶ 115*30*90(H)mm/175*30*90(H)mm (可选)
防护等级	▶ IP65
控制方式	▶ ON/OFF
证书	▶ CE & ROHS

产品尺寸

Unit: mm

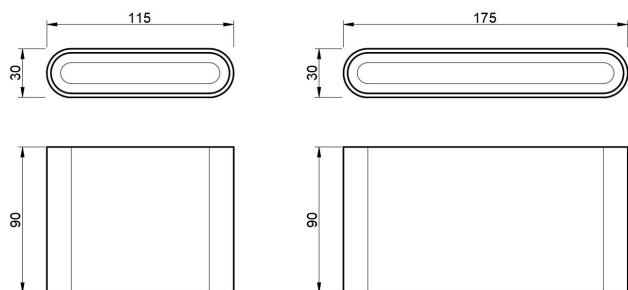

配光曲线

