

# 庭院灯

## GL1301

优质钢制灯杆，表面粉末喷涂处理，  
 优质丙烯酸灯罩，抗紫外线，抗老化，高透光率，  
 不锈钢螺钉(外部)紧固，安全、美观，硅密封，耐高温，耐风雨，  
 适用于大道、滨江路、广场、公园、商业中心等亮化工程。



R/G/B/W



可选择  
亮度调光



IP65



易于安装



可支持  
极端环境




AC-IN

### 规格参数

型 号	▶ GL1301
工作电压	▶ 100VAC,220VAC
功 率	▶ 30W
光源类型	▶ High Power LED
色 温	▶ 3000K,4000K,5000K,6000K
频 率	▶ 90min, 80min
光源效率	▶ 140 lm/W@3000K
发光角度	▶ 90°/110°/120°/130°
材 质	▶ 优质铝 + 亚克力
工作温度	▶ -20°C ~ +55°C
储存温度	▶ -25°C ~ +60°C
光源寿命	▶ 50,000 hours/L70 at 25°C
通电连接	▶ 快速接头 (可选)
产品尺寸	▶ 220*220*3500(H)mm
防护等级	▶ IP65
控制方式	▶ ON/OFF
证 书	▶ CE & ROHS

## 产品尺寸

Unit: mm

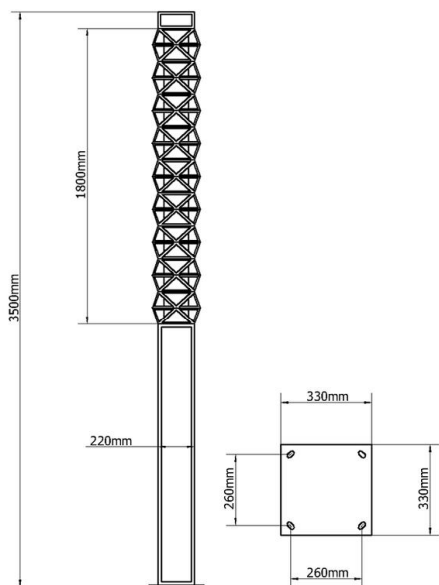

## 配光曲线

