

泛光灯 FL100S

采用现代设计风格，有效融入环境，
使用高效3030和3535 led芯片和中波HLG驱动器，
我们还为RGBW提供DMX512控制模型来构建应用程序
根据你的设计理念，
适用于体育场、体育馆、道路等。



R/G/B/W



易于安装



可选择
亮度调光



可支持
极端环境



IP67




AC-IN

规格参数

型 号	▶ FL100X
工作电压	▶ 110V AC, 220V AC
功 率	▶ 100W
光源类型	▶ LED 3030/LED 3535
色 温	▶ 3000K, 4000K, 5000K
频 率	▶ 90min, 80min
光源效率	▶ 150 lm/W@3000K
发光角度	▶ 30°/60°/90°/120°/60x135°/85x135°
材 质	▶ 优质铝 + PC
工作温度	▶ -20°C ~ +55°C
储存温度	▶ -25°C ~ +60°C
光源寿命	▶ 50,000 hours/L70 at 25°C
通电连接	▶ 快速接头 (可选)
产品尺寸	▶ 373*279*67(H)mm
防护等级	▶ IP67
控制方式	▶ ON/OFF
证 书	▶ CE & ROHS

产品尺寸

Unit: mm

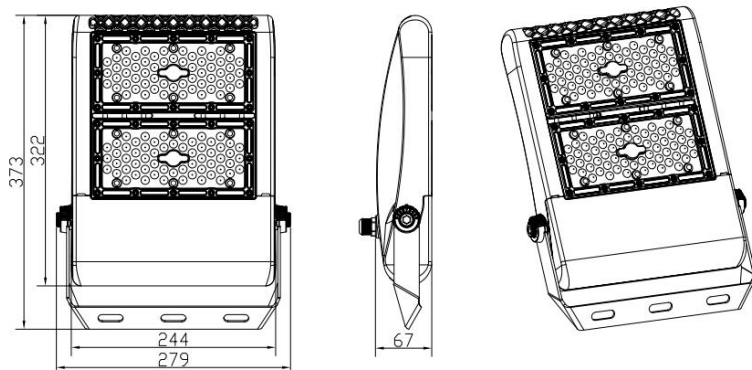

配光曲线

